


Dimensions	5,88 4626	5,88 4632
A Work Height	32' (9.75 m)	38' (11.58 m)
B Raised Platform Height	26' (7.92 m)	32' (9.75 m)
C Lowered Platform Height	45' (1.14 m)	48.5' (1.23 m)
D Overall Width	48" (1.17 m)	48" (1.17 m)
E Overall Length	91" (2.31 m)	91" (2.31 m)
F Stowed Height (Rais Up)	84.5" (2.15 m)	80" (2.24 m)
G Stowed Height (Rais Down)	70.5" (1.79 m)	74" (1.88 m)
H Platform Width (Inside Dimension)	42" (1.07 m)	42" (1.07 m)
I Platform Length (Inside Dimension)	84" (2.13 m)	84" (2.13 m)
Specifications	5,88 4626	5,88 4632
Extension Deck (Roll Out)	4' (1.22 m)	4' (1.22 m)
Ground Clearance (Stowed)	3.5" (8.89 cm)	3.5" (8.89 cm)
Ground Clearance (Raised)	0.75" (1.91 cm)	0.75" (1.91 cm)
Wheelbase	69" (1.75 m)	69" (1.75 m)
Weight	4,700 lbs (2,132 kg)	5,075 lbs (2,302 kg)
Gradeability	30%	25%
Turning Radius (Inside)	47.5" (1.21 m)	47.5" (1.21 m)
Turning Radius (Outside)	93.5" (2.37 m)	93.5" (2.37 m)
Lift Time (With Rated Load)	54 sec	59 sec
Lower Time (With Rated Load)	32 sec	49 sec
Drive Speed (Stowed)	2 mph (3.2 km/h)	2 mph (3.2 km/h)
Drive Speed (Raised)	0.6 mph (1 km/h)	0.6 mph (1 km/h)
Maximum Drive Height	Full Height	Full Height
Capacity (Overall)	1,000 lbs (454 kg)	700 lbs (318 kg)
Distributed Capacity (Main Platform)	700 lbs (318 kg)	450 lbs (204 kg)
Distributed Capacity (Extension Deck)	300 lbs (136 kg)	250 lbs (113 kg)
Local Floor Load (With Rated Load)	235 psi (1620 kPa)	220 psi (1517 kPa)
Overall Floor Load (With Rated Load)	191 psi (9 kPa)	204 psi (10 kPa)
Maximum # of Persons	3	2
Wind Rating	28 mph (12.5 m/s)	28 mph (12.5 m/s)
Tire Type	Solid, NFM	Solid, NFM
Tire Size	16 x 5 x 12	16 x 5 x 12

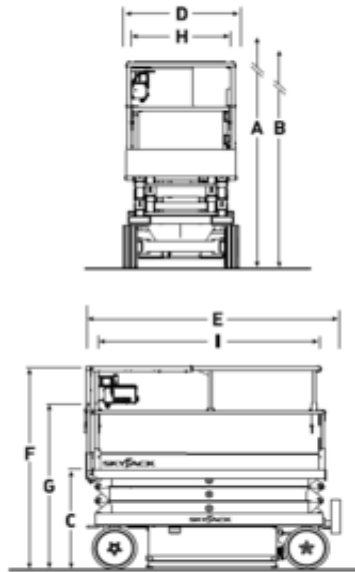

Kod najma

ESN118

Klasifikacija strojeva za najam

11.8

300

Sigurnosni zahtjevi



Specifikacije

Pogon podizanja	Električni
Pogon	Električni
Radna visina (m)	11.8
Maksimalana visina platforme (m)	9.8
Maksimalni bočni doseg (m)	
Maks. kapacitet dizanja (Kg)	318
Težina stroja (Kg)	2302
Transportne dimenzije (DxŠxV)	2.3 x 1.2 x 1.9
Dimenzije platforme (DxŠ)	2.1 x 1.1

Preporučeni broj ljudi	2
Upravljanje na povišenom	Da
Punjenje (V)	100-120v 220-240 V
Podloga i gume	U zatvorenom, Non-marking Hard