



**HOLLAND LIFT**

**ECOSTAR**



**2 wheel drive**

**1.00 to 1.65 m wide**

**Electric powered**


**Working height from 9.90 to 13.80 m**

**In / outdoors**

**Lift capacity max. 450 kg**

**Non-marking tyres**

**New!  
The Economical  
Quality Lift**



**FEATURES**

		HL-7810	HL-7814	HL-9710	HL-9714	HL-11812	HL-11816
Working height	H (max.)	± 9,90 m	± 9,90 m	± 11,70 m	± 11,70 m	± 13,80 m	± 13,80 m
Max. platform height	A (max.)	± 7,90 m	± 7,90 m	± 9,70 m	± 9,70 m	± 11,80 m	± 11,80 m
Min. platform height	C (min.)	1,22 m	1,22 m	± 1,35 m	± 1,35 m	± 1,51 m	± 1,51 m
Platform dimensions (retracted)	DxF (min.)	2,34 x 0,98 m	2,34 x 1,20 m	2,34 x 0,98 m	2,34 x 1,20 m	2,34 x 1,20 m	2,34 x 1,40 m
Platform dimensions (extended)	ExF (max.)	3,24 x 0,98 m	3,24 x 1,20 m	3,24 x 0,98 m	3,24 x 1,20 m	3,24 x 1,20 m	3,24 x 1,40 m
Transport height	H1	2,35 m	2,35 m	2,49 m	2,49 m	2,69 m	2,69 m
Transport height (handrail removed)	H2	1,50 m	1,50 m	1,64 m	1,64 m	1,84 m	1,84 m
Transport dimensions	LxB	2,49 x 1,00 m	2,49 x 1,45 m	2,49 x 1,00 m	2,49 x 1,45 m	2,49 x 1,25 m	2,49 x 1,65 m
Wheel base	G	1,89 m	1,89 m	1,89 m	1,89 m	1,89 m	1,89 m
Ground clearance	M/N	128 mm	128 mm	128 mm	128 mm	128 mm	128 mm
Turning radius inside	Ø R	0,00 m	0,00 m	0,00 m	0,00 m	0,00 m	0,00 m
Capacity main-platform	⊗ (max.)	450 kg (2 p. +290 kg)	450 kg (2 p. +290 kg)	325 kg (2 p. +165 kg)	325 kg (2 p. +165 kg)	300 kg (2 p. +140 kg)	300 kg (2 p. +140 kg)
Capacity roll-out deck	⊗ (max.)	450 kg (2 p. +290 kg)	450 kg (2 p. +290 kg)	325 kg (2 p. +165 kg)	325 kg (2 p. +165 kg)	300 kg (2 p. +140 kg)	300 kg (2 p. +140 kg)
Lift-/lower time (max. load)	⬆️ (sec.)	40/32 sec.	40/32 sec.	45/35 sec.	45/35 sec.	50/38 sec.	50/38 sec.
Driving speed (high)	🚗	± 3,2 km/h	± 3,2 km/h	± 3,2 km/h	± 3,2 km/h	± 3,0 km/h	± 3,0 km/h
Driving speed (low)	🚗	0,5 km/h	0,5 km/h	0,5 km/h	0,5 km/h	0,5 km/h	0,5 km/h
Tyres, non-marking (solid rubber)	🛞	Ø 413 x 178	Ø 413 x 178	Ø 413 x 178	Ø 413 x 178	Ø 413 x 178	Ø 413 x 178
Grade ability	🏔️ (max.)	± 25%	± 25%	± 25%	± 25%	± 25%	± 25%
Batteries (traction acid)	🔋	200Ah/k5/24v	200Ah/k5/24v	200Ah/k5/24v	200Ah/k5/24v	255Ah/k5/24v	255Ah/k5/24v
Gross weight	🏋️	2380 kg	2440 kg	2510 kg	2740 kg	3200 kg	3260 kg

OPTIONS	HL - 7810	HL - 7814	HL - 9710	HL - 9714	HL - 11812	HL - 11816
Control box with quick disconnect	●	●	●	●	●	●
Hour meter	●	●	●	●	●	●
230V supply on the platform	○	○	○	○	○	○
Charger (high frequency)	●	●	●	●	●	●
Driving, proportional	●	●	●	●	●	●


  

SAFETY FEATURES	HL - 7810	HL - 7814	HL - 9710	HL - 9714	HL - 11812	HL - 11816
Pothole protection	●	●	●	●	●	●
Descent safety	●	●	●	●	●	●
Drive alarm	●	●	●	●	●	●
Emergency descent	●	●	●	●	●	●

APPLICATION	HL - 7810	HL - 7814	HL - 9710	HL - 9714	HL - 11812	HL - 11816
Indoors	●	●	●	●	●	●
Outdoors	-	●	-	●	-	●
Certified min. temperature	-15°C	-15°C	-15°C	-15°C	-15°C	-15°C

● = Standard ○ = Option - = Not available

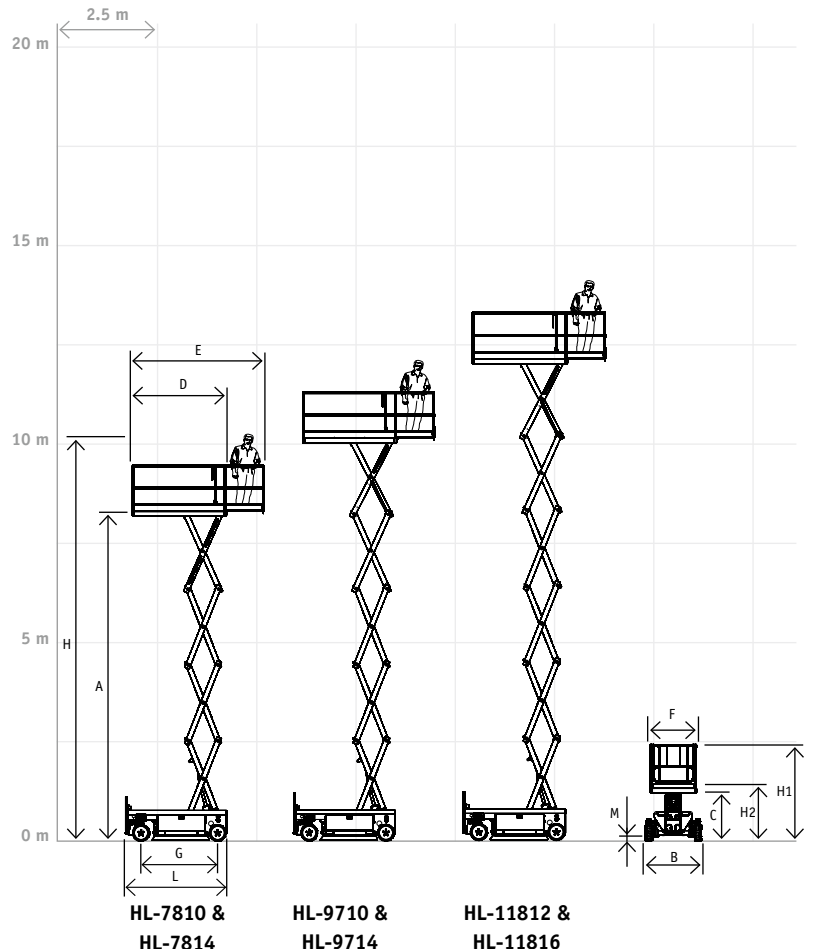

**Holland Lift International B.V.**  
 Anodeweg 1  
 NL-1627 LJ Hoorn  
 The Netherlands

Tel: +31 (0) 229 285555  
 Fax: +31 (0) 229 285550  
 E-mail: info@hollandlift.com  
 Website: www.hollandlift.com